

LAC 74.1


Load Cell Amplifier with Analogue Output

SENSOR
TECHNIQUES LIMITED



Analogue Load Cell Amplifier with Analogue Output

- Linearity better than 0.010 % of full scale
- Analogue outputs of 0/4...20mA or 0 - 10V DC
- Independently EMC tested and fully CE approved
- Capable of driving up to four 350 Ohm Load Cells
- Active low pass filter from 0.33 Hz to 33 Hz
- Supply voltage 12 - 24 VDC +10/-15%
- Zero offset up to $\pm 90\%$ of full scale
- Input signal range up to 3.5 mV/V
- Zero and Span coarse and fine adjustment
- PCB with plated steel case mounted on DIN rail clips

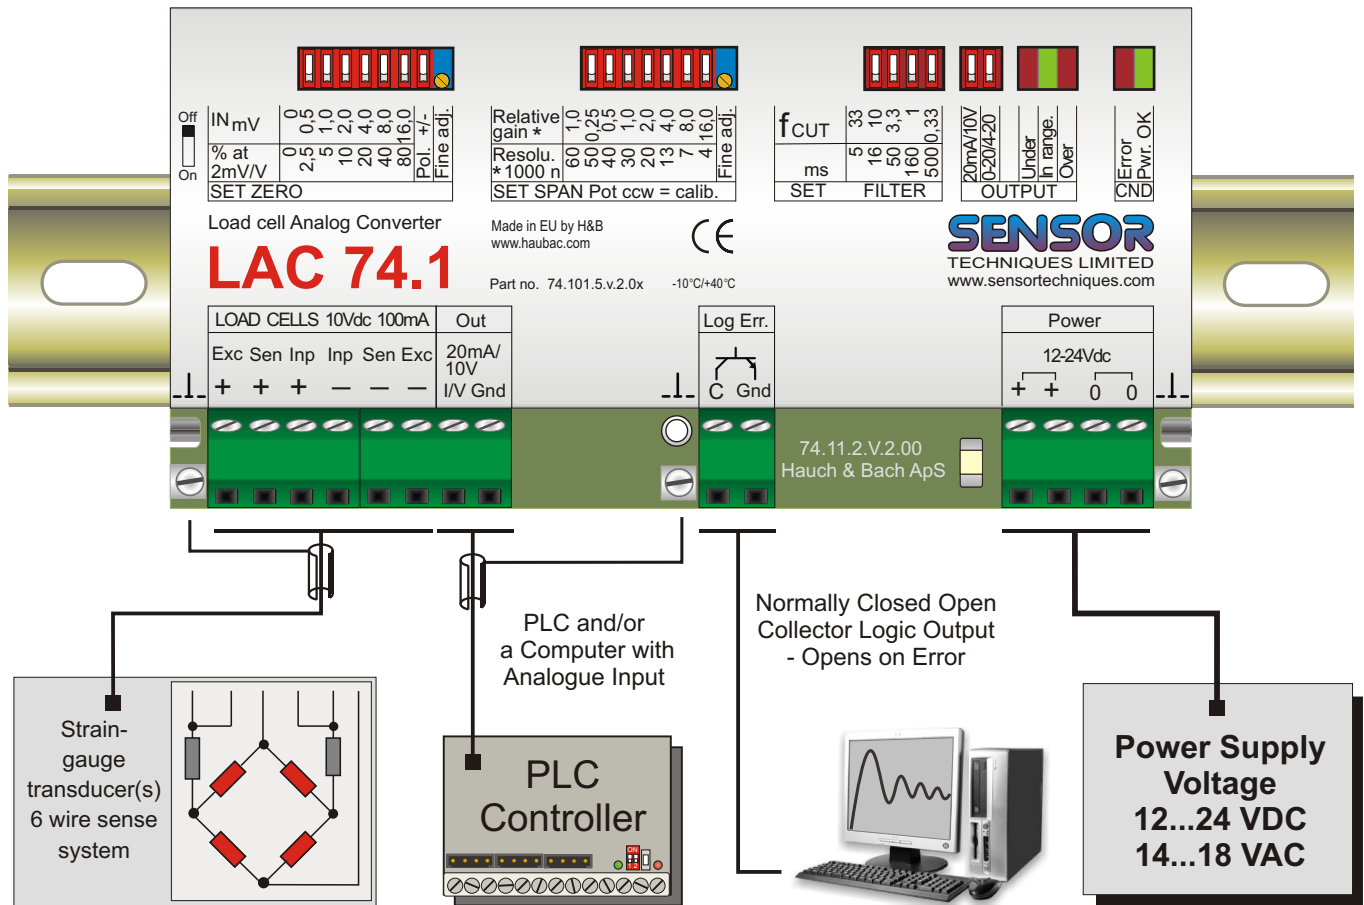

Specifications

Specifications are subject to change without prior notice

Linearity	: < 0.010 % F.S.
Excitation Voltage	: 10V DC with sense circuit, driving up to 4 transducers with 350 Ohm bridges
Input Signal Range	: 0.1...3.5mV/V in 32 steps
Signal Filter	: 0.33 ...33 Hz active low pass filter in 5 steps
Indicators	: LEDs to show Signal Under-/Over-/In-range, Internal Power ON and Error
Logic Output	: Normally closed open collector output which opens when an error occurs (short circuit on load cell supply, signal or sense wires/output out of range/power failure/4-20mA loop open circuit)
Tare offset	: ± 90% of full scale while still allowing the remaining 10% to be scaled 4-20mA or 0-10V
Current Output or Voltage Output	: 4 - 20mA or 0 - 20mA : 0 to 10V
Temperature Effect Zero	: < ±25ppm/°C
Temperature Effect Span	: < ±50ppm/°C
Temperature Range	: -10°C to +40°C
Construction	: Single PCB enclosed in a plated steel case, mounted on dual TS35 clips
Dimensions	: 135 x 66 x 28 mm (W x D x H)
Weight	: Approx. 0.2 kg
Power Supply	: 12 ...24 VDC +10/-15% or 14-18VAC, 3W max.

DSLAC74.1-2,03/07



TECHNIQUES LIMITED

Tel. +44 (0)1446 771185 Fax +44 (0)1446 771186

Precision Load Cells
Accessories and Mountings
Measuring Instruments and Systems